

M A T T
F I N I S H

ARKWALL
DIGITAL WALL TILES

300X600MM
WALL TILES

LET WALLS DO **THE TALKING**

COMPANY OVERVIEW

"The best way to predict the future is to create it."

"Knowledge is worthless if it is not having the direction of customer satisfaction by offering value for money". Keeping this philosophy in our mind & zeal to serve the society in our heart, production becomes a creation at Accord group of companies. The same is reflected in our end products which are certified with ISO 9001: 2015 & CE marking. "Assist people to achieve their objectives & in return, you will achieve yours". We believe that our success lies in the success of our business partners. We put every effort to help our business associates to achieve the highest level of satisfaction & monetary benefits by quality products, competitive prices & above all, a clean policy. Accord management is keeping an eagle's eye on the changing vogues to meet & beat every challenge be it quality, design or price.

Building Area

195K sq. mtrs

Land Area

240K sq. mtrs

Office Area

8K sq. mtrs

Production Capacity

29M sq. mtrs per year





300X600MM
WALL TILES

300x600mm | 250x750mm
300x300mm | 300x450mm

FEATURES



LIVING



HOTEL



OFFICE



INDOOR



BATHROOM



WALL



MATT FINISH


Feel the exquisite finish that exudes sensational charm in your space.

accordceramics.com



9013

ARKWALL
DIGITAL WALL TILES

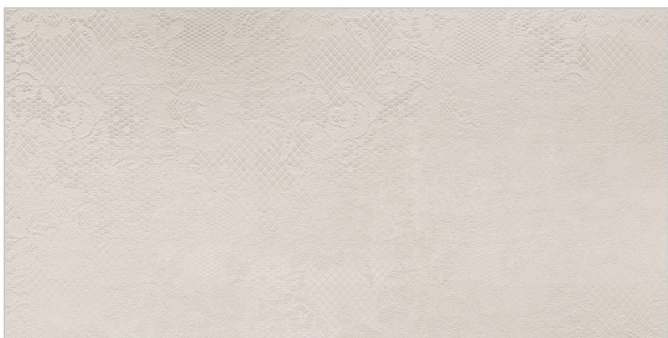

LT



R-3 HL 1




DK



R-3 HL 2



9017

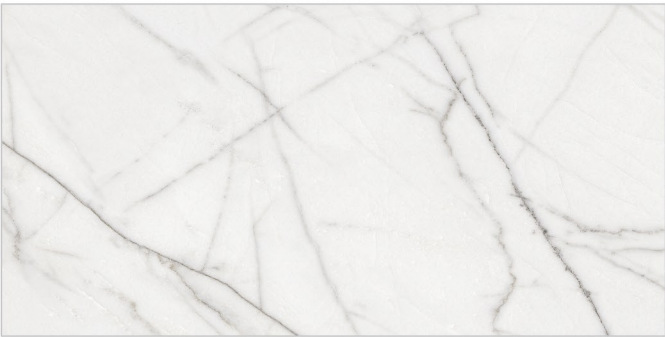


LT




R-4 HL 1



9021

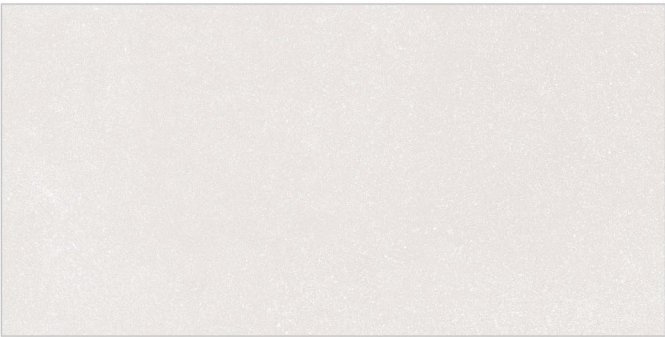

LT

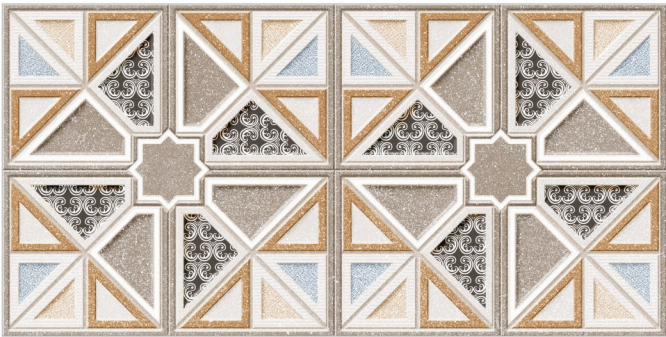

R-4 HL 1



DK

R-4





9024




LT



R-3 HL 1



DK

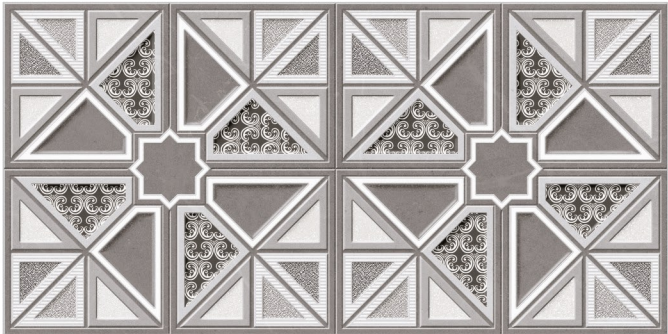

R-3 HL 2



9026



LT



HL 1



DK

R-3

R-3



9027



LT



R-2 HL 1



DK



R-2 HL 2






9028



LT

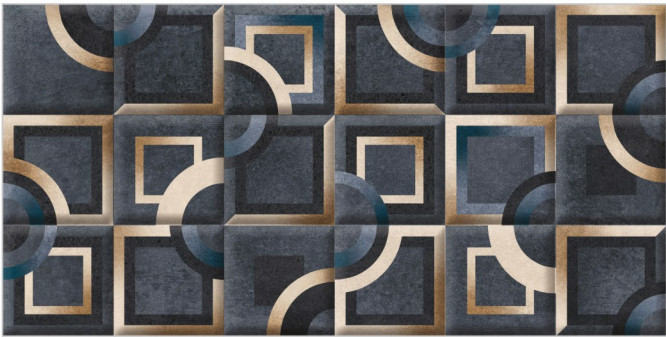

HL 1




DK

R-3

R-3



9030

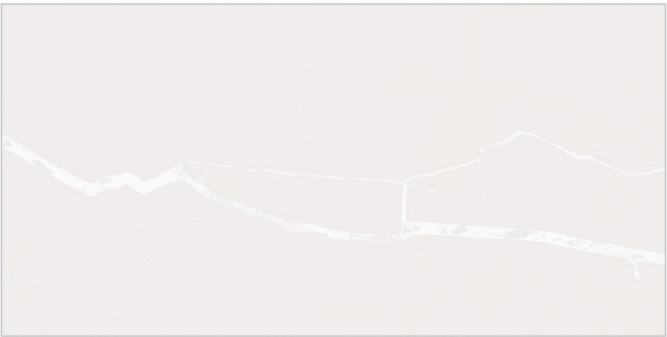

LT



HL 1



DK

R-4

R-4






9035




LT

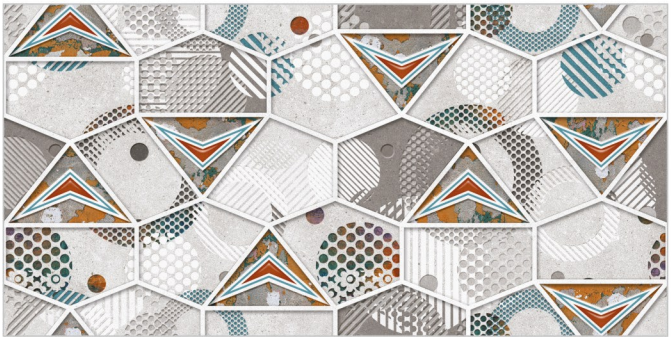

R-4 HL 1



DK

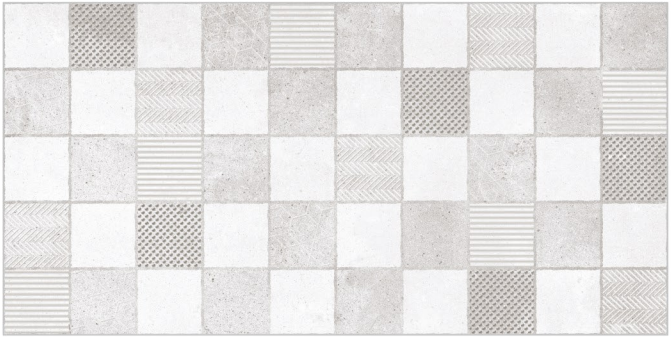

R-4 HL 2



9036



LT



R-4 HL 1




DK

R-4



9042

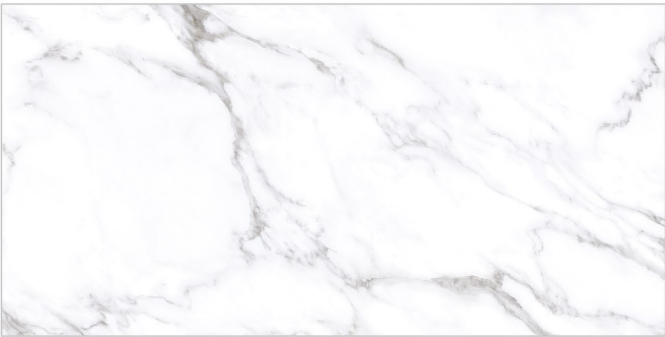

LT



R-4 HL 1




HL 2



9043



LT

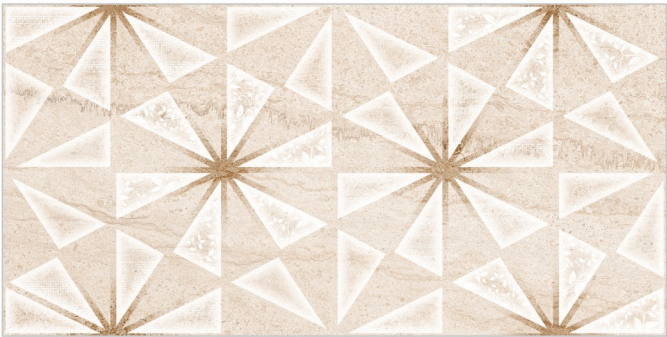


R-4 HL 1



HL 2



9044

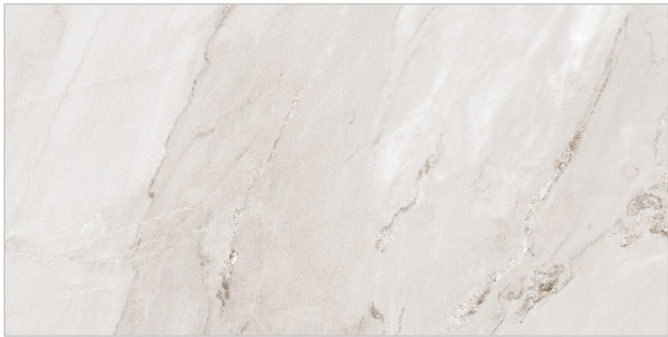

LT



R-4 HL 1



DK




R-4 HL 2






9051

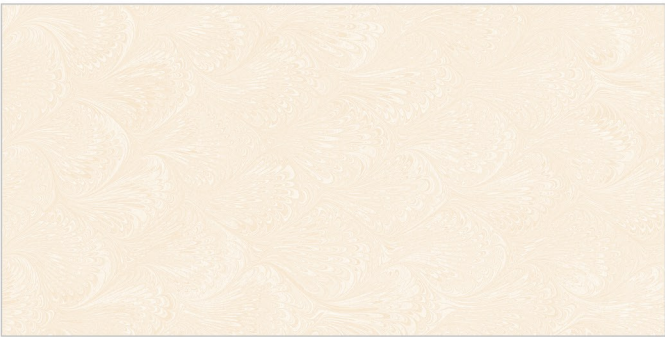

LT

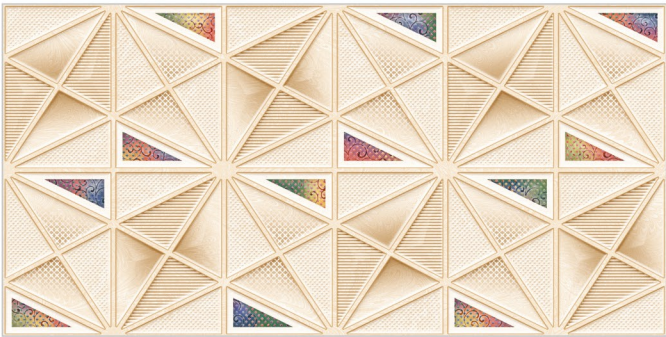

HL 1



DK



9053



LT




HL 1



HL 2



9054

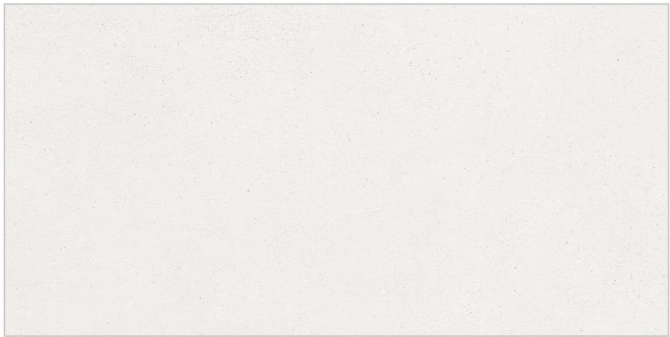

LT



R-2 HL 1




DK



R-2 HL 2



9058

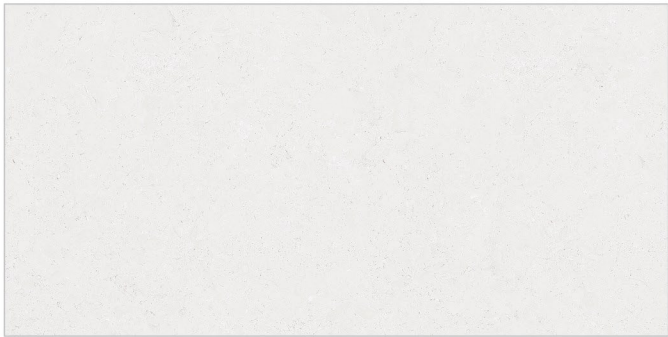

LT



HL 1



DK

R-3


R-3



9065




LT

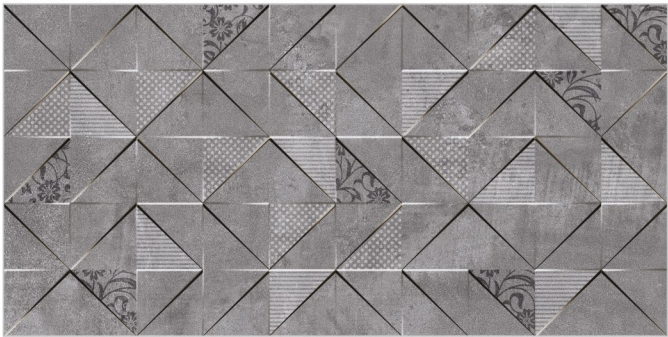

R-3 HL 1



DK

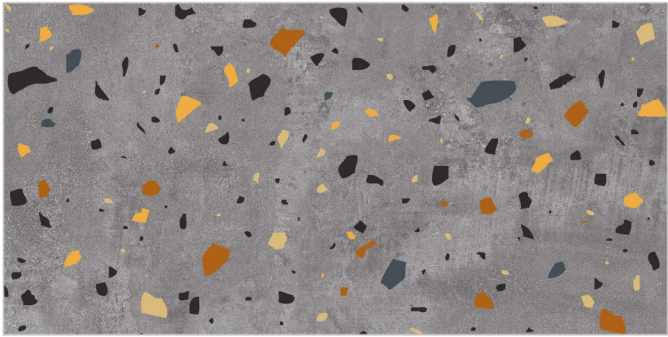

R-3 HL 2



9066



DK




R-3 HL 1



9069

ARKWALL
DIGITAL WALL TILES

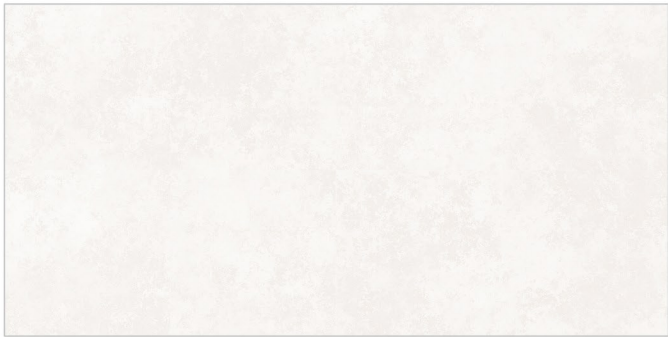

LT



HL 1



DK



9072



LT



R-3 HL 1



DK

R-3






9076



LT



R-5 HL 1

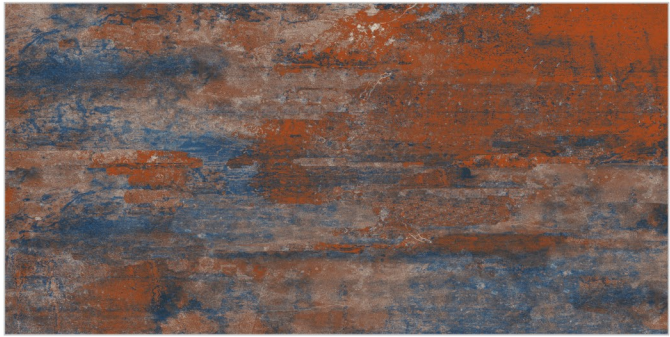


DK

R-5



9077

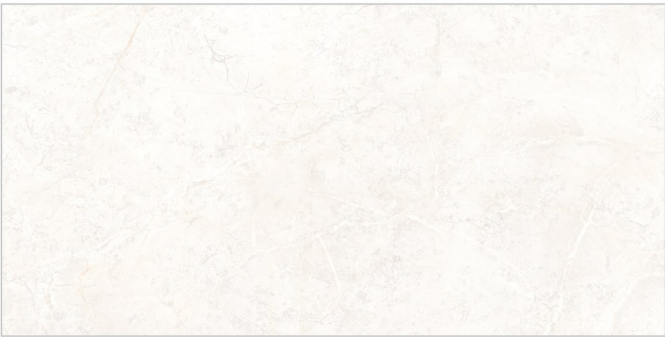

LT



HL 1




DK

R-4


R-4



9082

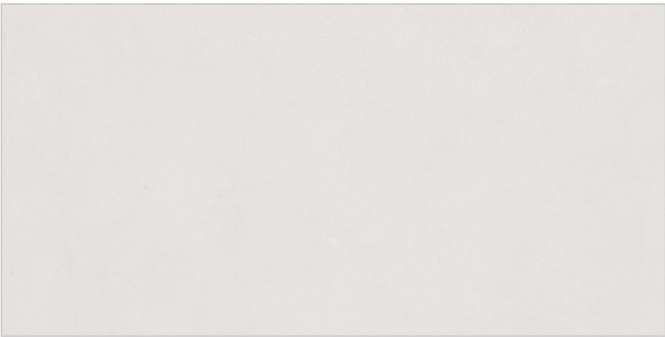

LT

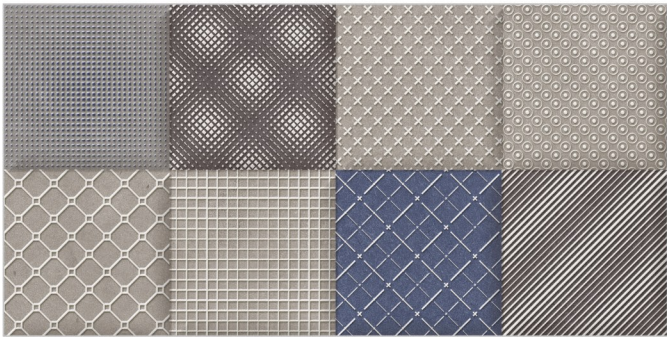


HL 1



DK



9084

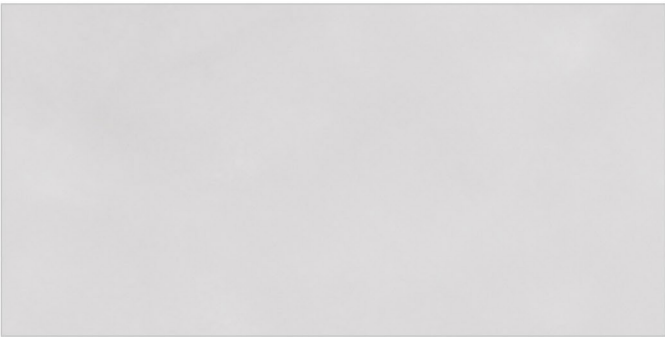

LT



HL 1



DK



9085



LT




HL 1



9090

ARKWALL
DIGITAL WALL TILES

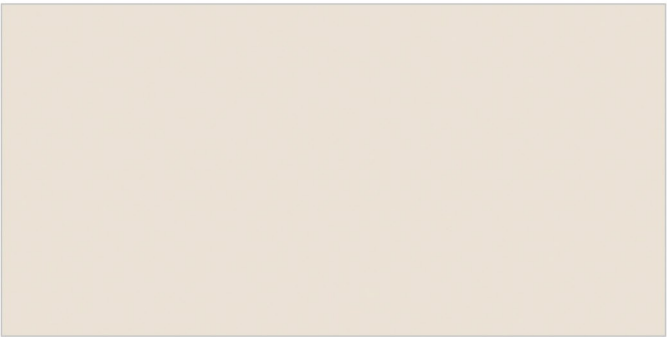

LT



HL 1



9091



LT




R-3 HL 1



9092



LT

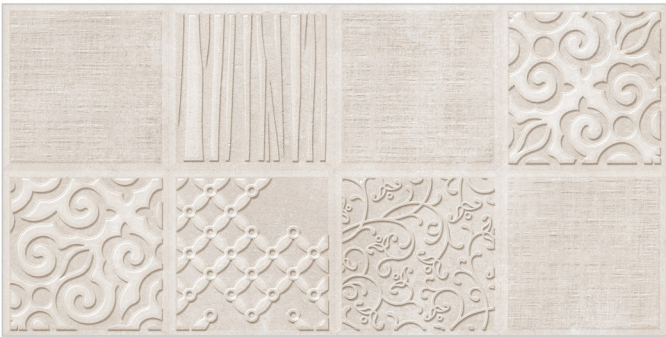

R-3 HL 1





9097



LT



R-3 HL 1



9103



LT

R-3



HL 1



DK

R-3



9105



LT



HL 1



DK

R-3

R-3



9106



LT



R-6 HL 1



DK



R-6 HL 2



9107



LT



HL 1



DK



9110



LT



HL 1



DK

R-3


R-3




9114




LT

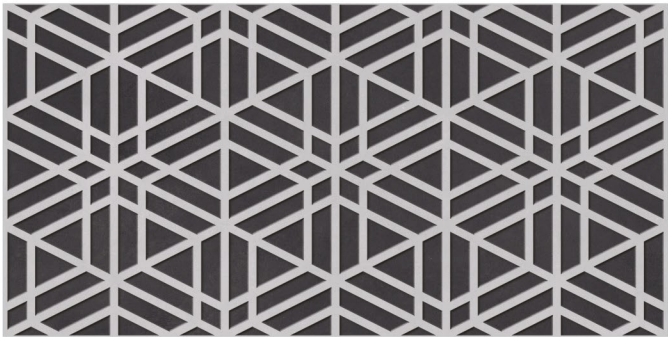

R-3 HL 1

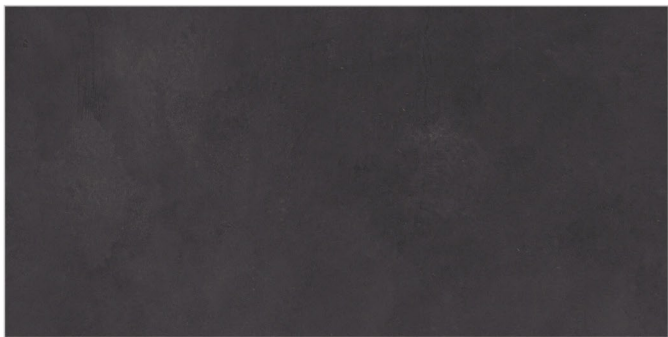

DK

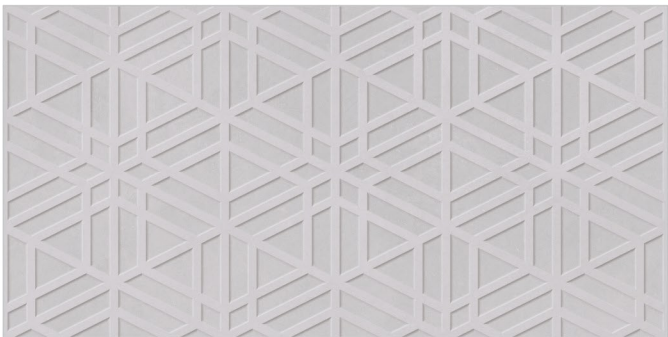


R-3 HL 2



9116



LT

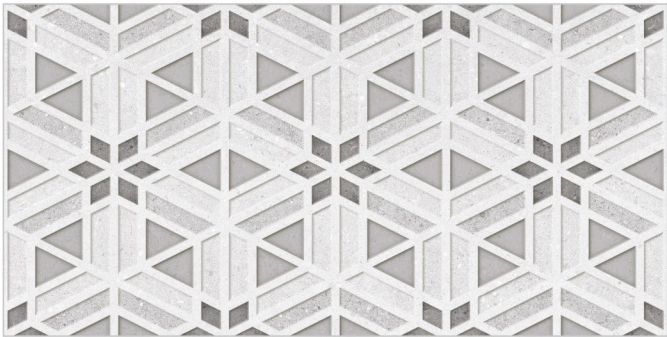

R-3 HL 1



9117



LT



HL 1



DK


R-3

R-3




9119

ARKWALL
DIGITAL WALL TILES

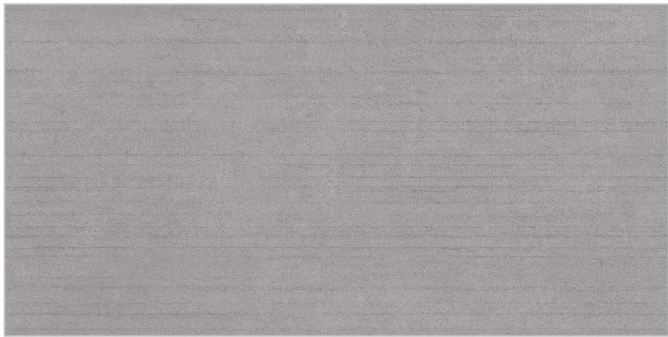

DK

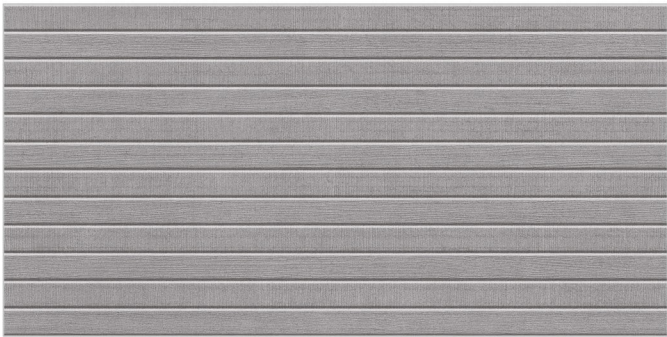


HL 1



9120



DK

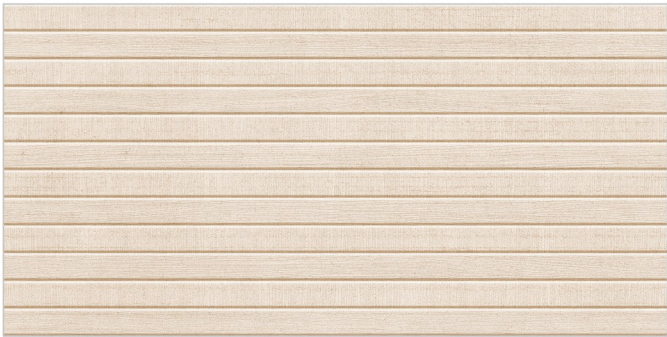

HL 1



9122



LT



R-3 HL 1




DK

R-3





9131

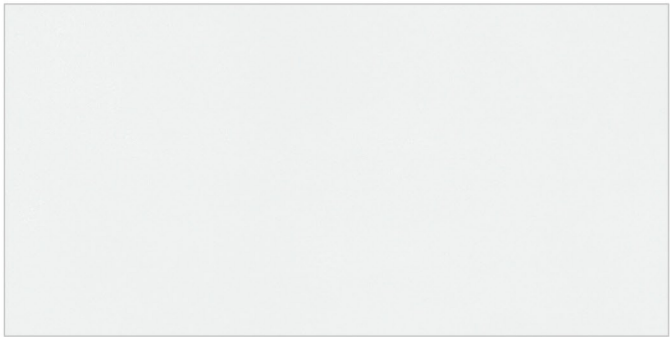

LT



R-4 HL 1



DK


R-4



9135



LT

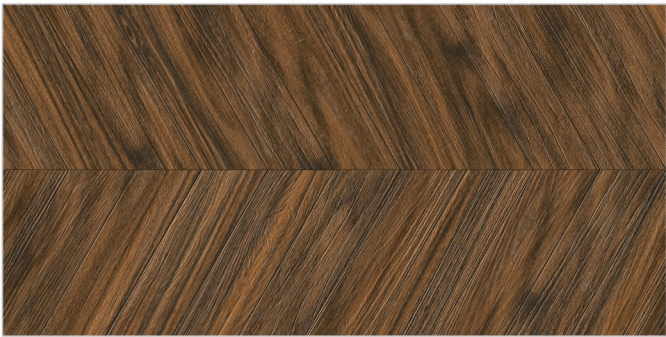

R-3 HL 1



DK

R-3



9136



LT



HL 1




DK

R-3

R-3



9138

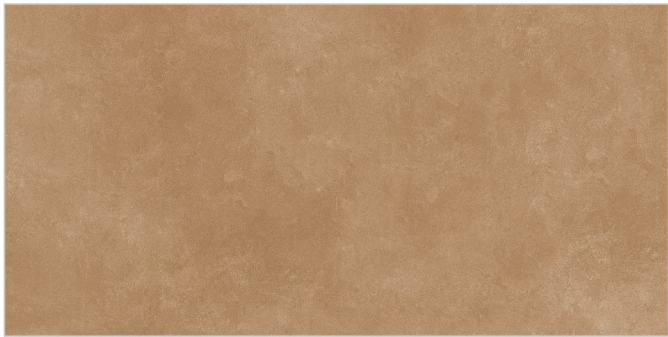

DK

R-4



HL 1

R-4



HL 2



9139



LT



R-4

HL 1

R-4



HL 2






9140



LT



HL 1

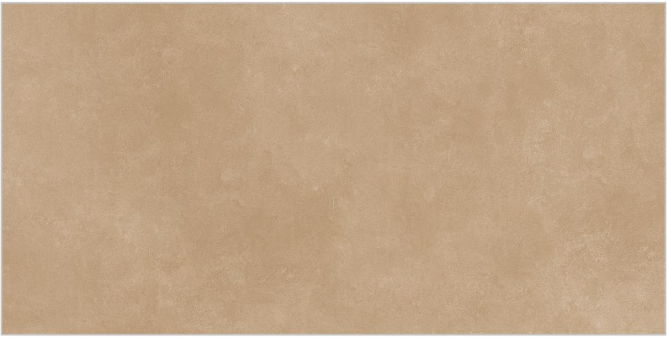

DK




HL 2



9141



DK

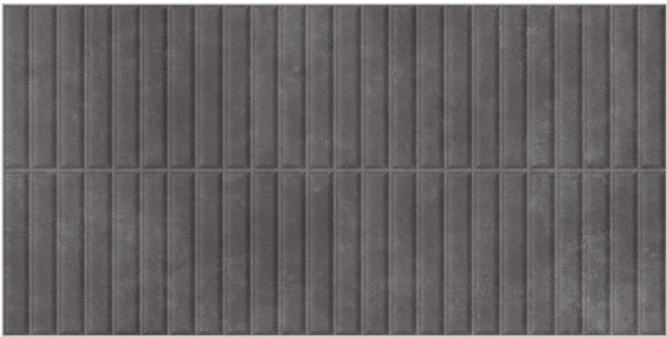

R-4



HL 2



9145




LT

R-4



HL 1

R-4

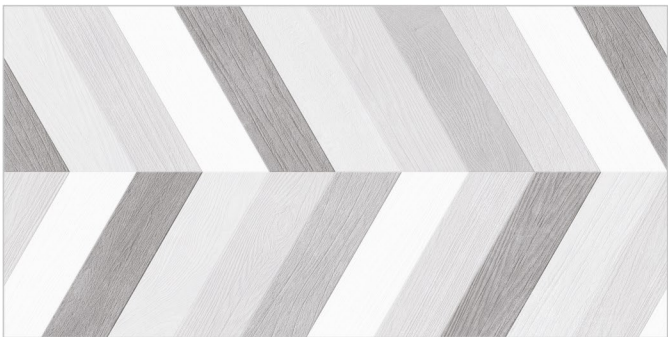

HL 2



9146




LT

R-3



HL 1

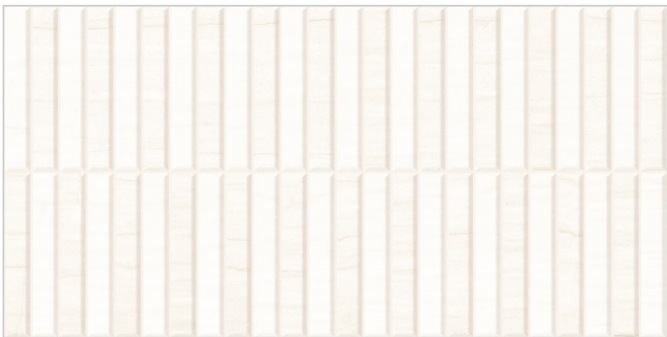

HL 2




9150



LT

R-4

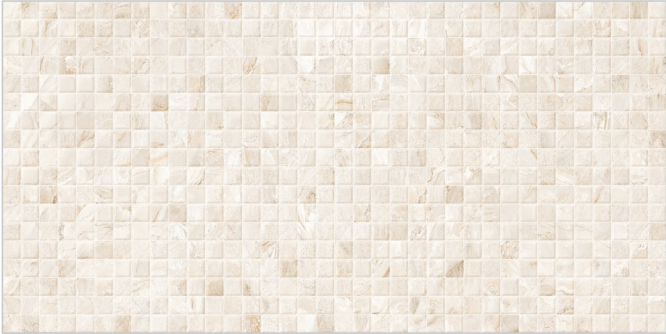


HL 1



HL 2



9155

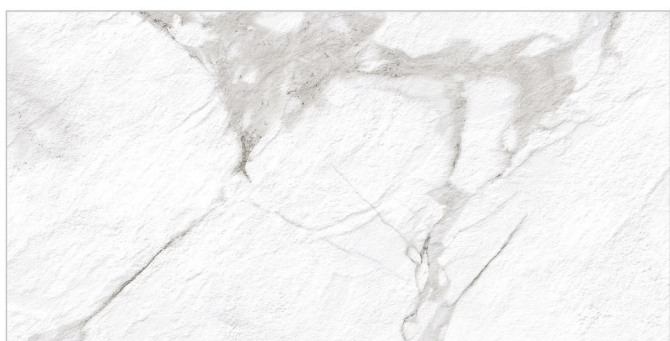

LT



R-4

HL 1




AC-7204



LT



R-4 HL 4

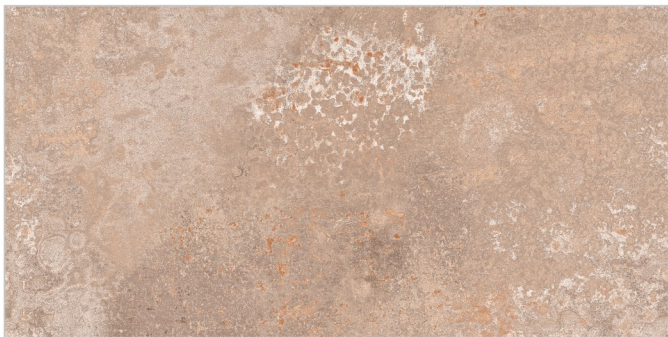


DK



R-4 HL 5



AC-7211

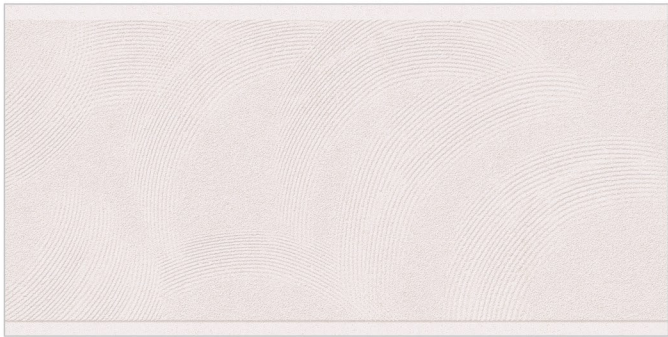

LT



HL 1



DK




HL 3



AC-7214



LT

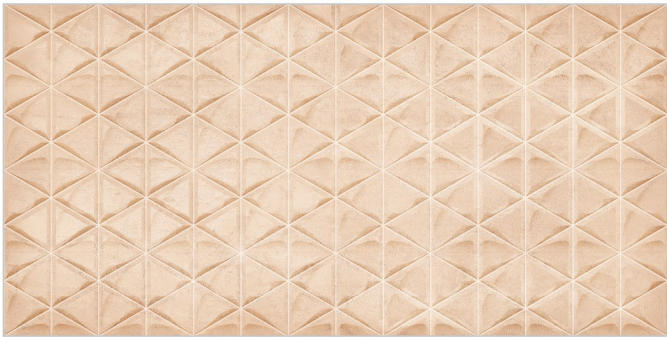


HL 1



HL 2



AC-7241

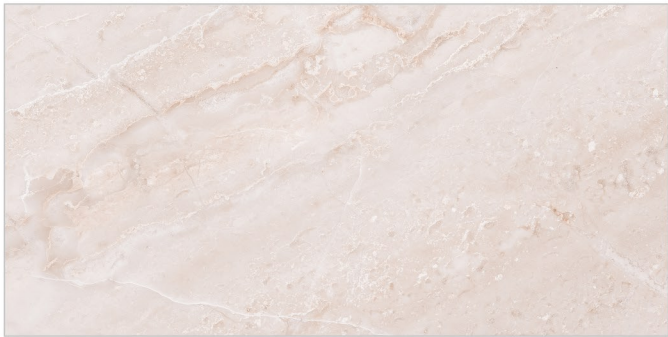

LT



R-3


HL 2



HL 5




AC-7317

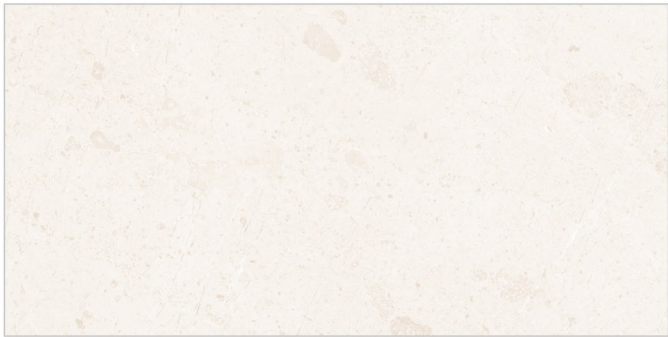

LT



R-4 HL 1

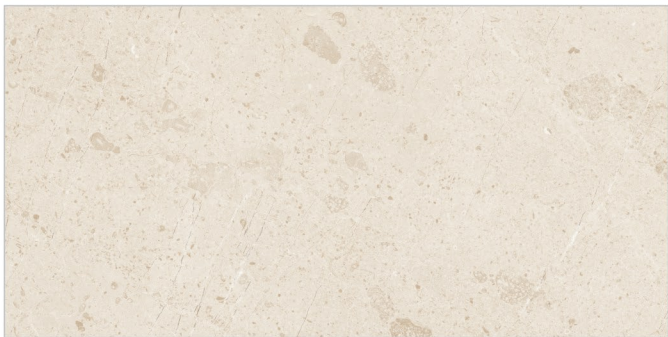

DK




R-4 HL 3



AC-7318



LT

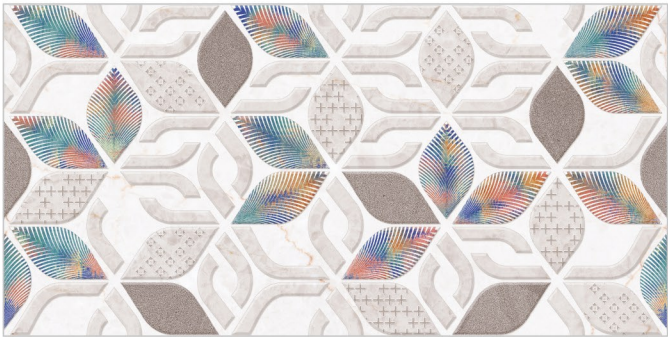

HL 1




DK



HL 2



AC-7328

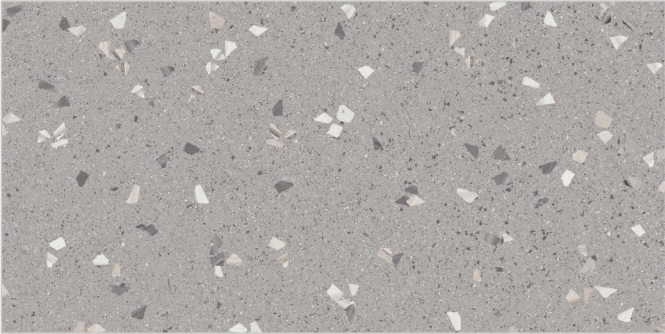

DK

R-4



HL 1




HL 2





AC-7329

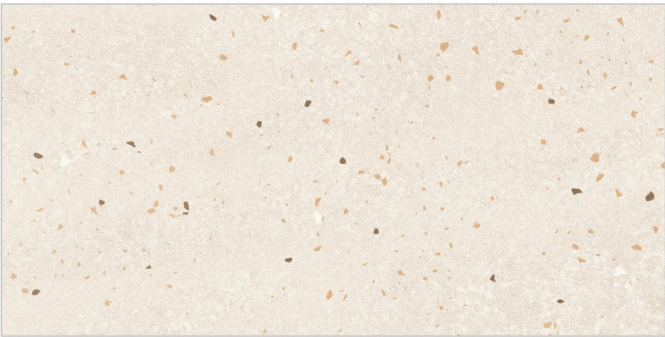

LT

R-3




HL 1




HL 5



AC-7330

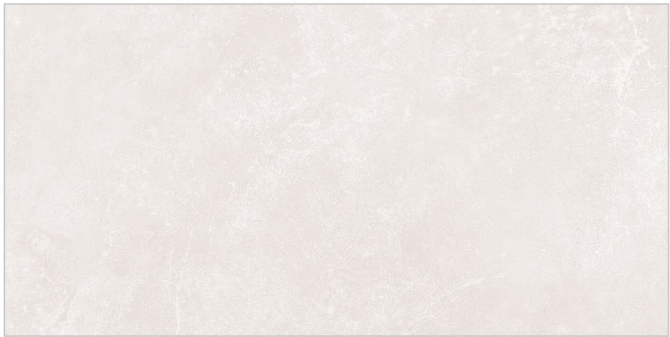

LT

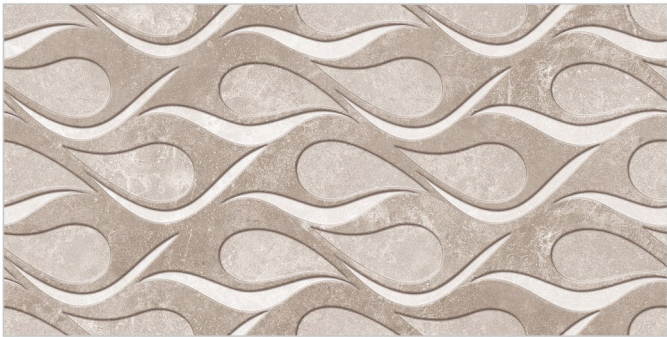

R-3 HL 1




DK



R-3 HL 2




AC-7335

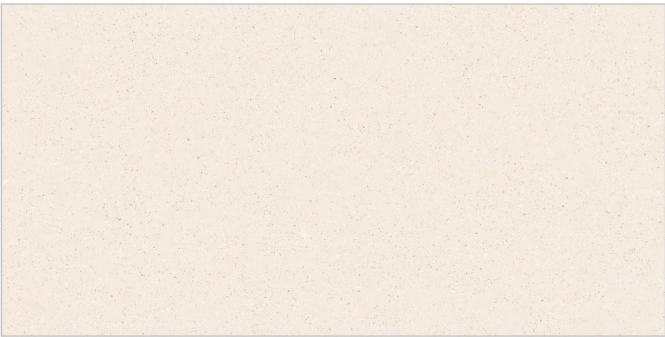


LT



HL 1

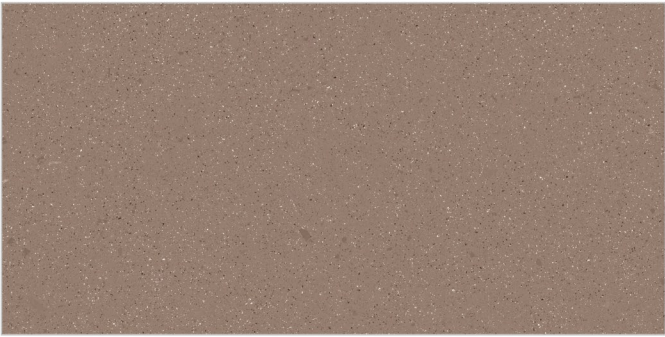

DK

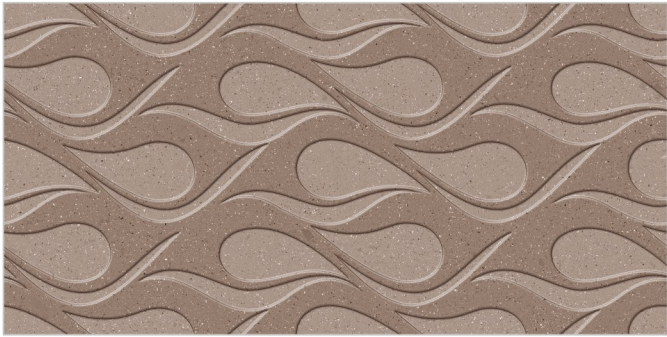

HL 2




AC-7340



LT



R-3 HL 1

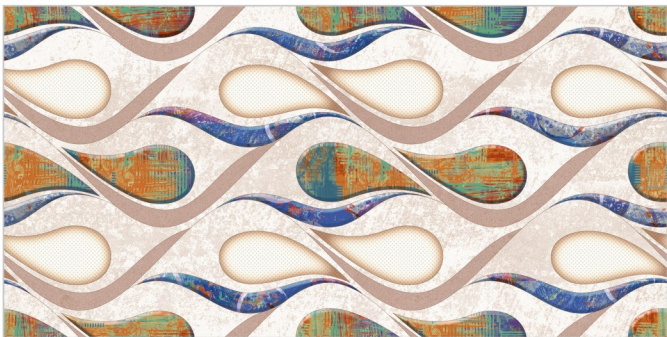


HL 2





AC-7343

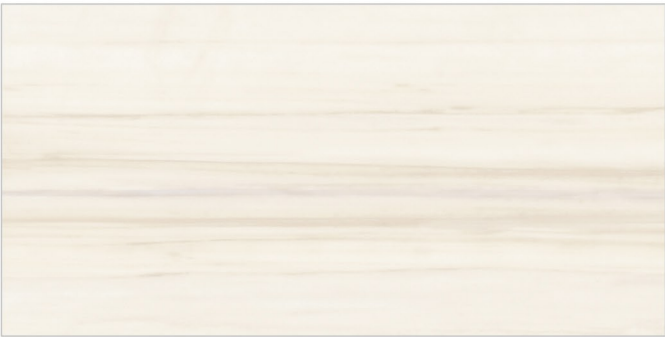


LT

R-4




HL 1

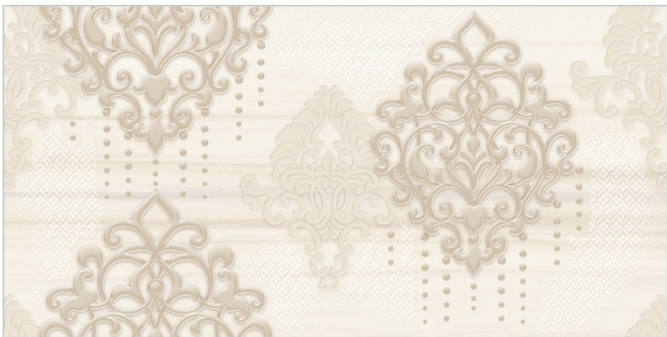


HL 3




AC-7358

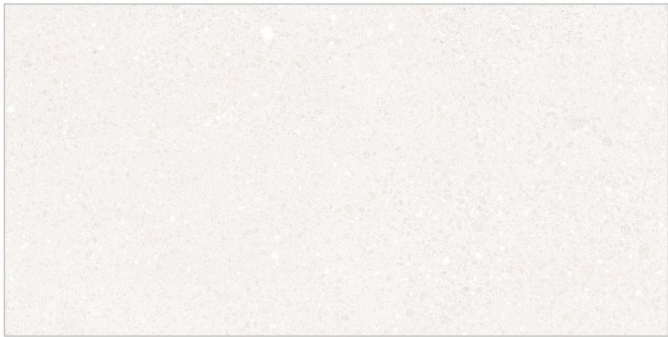

LT

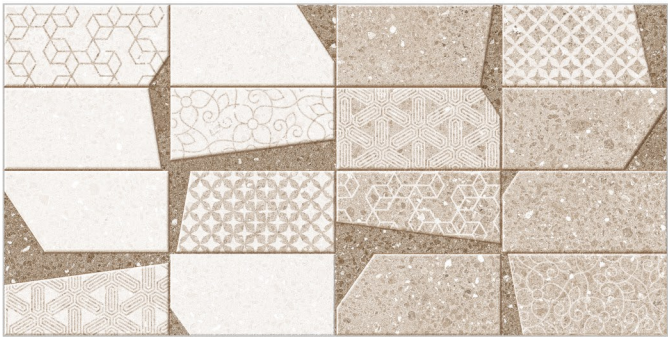

R-3 HL 1

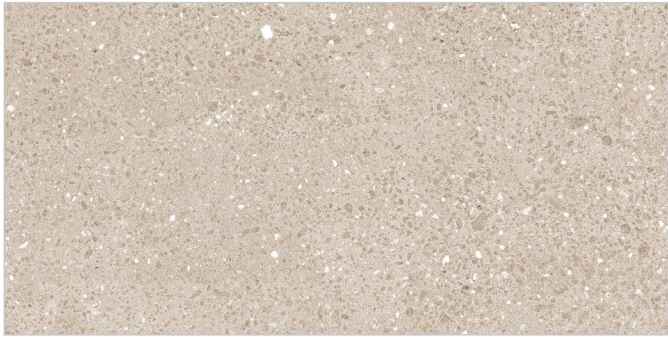

DK



R-3 HL 2



AC-7365

ARKWALL
DIGITAL WALL TILES



LT



R-3 HL 1



DK




R-3 HL 2



AC-7368



LT

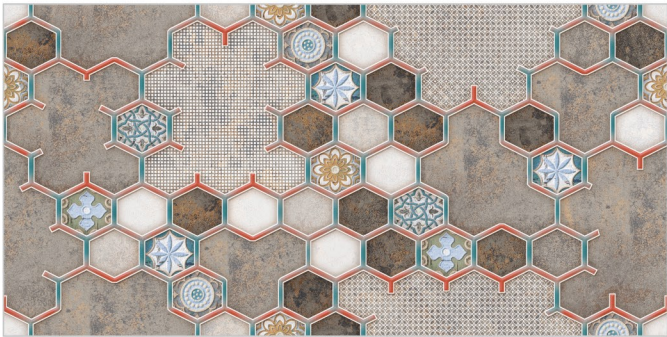

R-3 HL 1



DK



R-3 HL 2



AC-7379



LT



R-3 HL 1



DK



R-3 HL 3





AC-7416



LT



R-3 HL 1



HL 3



AC-7489



LT

R-4



HL 1



DK

R-4



AC-7493



LT



R-4 HL 1



DK

R-4



FIXING WALL TILES



WALL REQUIREMENT

THE WALL SHOULD BE STRONG AND FLAT AND THE SURFACE SHOULD BE SMOOTH. THE WALL SHOULD BE WAXED/PAINTED. THE WALL SHOULD BE CLEAN AND DRY. IF THE TILING HAS TO BE DONE ON PLYWOOD, THE SURFACE OF WALL SHOULD SEALED WITH 50% VOLUME MIXTURE OF PVA AND WATER.



TILES PREPARATION

MIX THE TILES FROM DIFFERENT CARTOON WHICH WILL HELP IN FINE BLENDING OF SHADES.



TILES LAYING

FIRSTLY, APPLY THE HIGH QUALITY CERAMIC ADHESIVE ON THE WALL AND PLACE FIRST TILE ON THE CORNER. APPLY EVEN PRESSURE ON THE FOUR CORNER OF THE TILE TO ENSURE STICKING. FILL THE AREA OF WALL THE CAN BE FITTED WITH THE TILE WITHOUT CUTTING AND LEAVE IT FOR AT LEAST 12 HOURS. FILL THE REST OF AREA WITH THE MEASURES AND CUT FILES.



TAMPING PROCESS

TO ENSURE THE PROPER CONTACT OF TILES WITH THE WALL, TEMP EVERY TILE WITH A RUBBER MALLET TAMP.



APPLYING GROUT

ON THE NEXT DAY, THE GROUTING IS DONE. APPLY THE GROUT DIAGONALLY BETWEEN THE TILE USING A SPONGE TO FILL THE GAPS BETWEEN THE TILES. CLEAN AND WIPE THE SURPLUS GROUT WITH A SPONGE.



WINDOW RECESS TILLING AND CUTTING

TILES HAS TO BE CUT IN "L" SHAPE FOR WINDOW RECESS. CUT A LINE FROM CENTER TO EDGE AND THEN DRAW A RIGHT ANGLE LINE VERTICALLY DOWN. CUT THE LINE TO GET AN "L" SHAPE THAT CAN IN A WINDOW.



ACCESSORY TILE FITTING

WHILE LAYING THE NORMAL TILES, KEEP ON EMPTY SPACE WHERE THE ACCESSORY TILES WILL BE FITTED. APPLY THE ADHESIVE ON THE BACK OF ACCESSORY TILES AND PLACE IT UNIFORMLY IN THE SPACE AND APPLY EVEN PRESSURE TO PLACE THE ACCESSORY TILE.



TILES DRILLING

APPLY MASKING TAPE TO COVER THE AREA TO BE DRILLED. MARK THE POSITION OF HOLE AND DRILL THE HOLE WITH LOWEST POSSIBLE PRESSURE ON THE DRILL.



CURVE CUTTING

TO FIT THE TILES IN A CURVED SURFACE OF WASHBASIN AND OTHERS, MEASURE AND MARK THE CURVE ON A CARDBOARD BY PLACING THE CARDBOARD ON THE BASIN AND THEN CUT IT.



HOLE CUTTING

TO PASS THE PIPE THROUGH THE TILE, THE TILES NEED TO BE CUT IN A SPECIFIC MANNER. MARK THE POSITION ON THE FILE. WHICH THE TILE. WHICH THE TILE WILL OCCUPY. DRAW A STRAIGHT LINE PASSING THROUGH THE CENTER OF THE CIRCLE. CUT THE TILE ON THE DRAWN AREA. THEN CUT THE SEMI CIRCLE ON EACH OF THE HALF AND WHEN THESE TWO HALVES ARE PLACED TOGETHER, IT WILL FORM A HOLE.

TECHNICAL SPECIFICATION

CHARACTERISTICS	EURO STANDARDS EN - 159 / IS 13753	MEAN VALUE OF ACCORD
DIMENSION & SURFACE QUALITY		
1) Dimension	±0.5%	±0.2%
2) Deviation in Thickness	±0.6 mm	±0.2 mm
3) Straightness of sides	±0.3%	±0.2%
4) Rectangularity	±0.5%	±0.3%
5) Surface Flatness	±0.5%	±0.3%
6) Surface Quality	Min. 95%	Min. 96%
PHYSICAL PROPERTIES		
1) Water Absorption	> 10%	13.5%
2) Bending Strength	> 150 kg/cm ²	200 - 250 kg/cm ²
3) Scratch hardness (Mohs)	Min. 3	Min. 3
4) Crazing	1 Cycle	No Crazing at 4 Cycles
CHEMICAL PROPERTIES		
1) Staining Resistance	Min. Class 2	Resistance to all Acids And Alkalies & Household Chemicals, except Hydrofluoric Acid
2) Household Chemical	Min. Class B	
THERMAL PROPERTIES		
1) Thermal Shock	Resistant to 10 Cycles	CONFORMS
2) Thermal Expansion	Max - 9E ⁻⁰⁶	CONFORMS

Our conformity to the above standard is applicable only for premium quality

PACKING DETAIL

Size	pcs./ Box	sq. ft/ Box	sq. mtrs/ Box	Weight/ Box	Box/Pallet	Pallet/ Container	Total Box/ Container	Total Sq. Mts/ Container	Total Weight/ Container
30x60cm	5	9.68	0.9	14.0 kgs	96	20	1920	1728.00	27456.0
30x30cm	8	7.75	0.72	10.0 kgs	120	23	2760	1987.20	27950.00

Note :

1. Certain amount of size and shade variation is inherent in all ceramic products.

2. Our conformity to the above Fast is applicable only for Quality.

3. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company dose not accept responsibility once the tiles are laid.



ACCORD PLUS CERAMICS PRIVATE LIMITED

[Mfg. Digital Wall Tiles]

S. No. 134/P7, Near Narmada Canal, Morbi - Halvad Road,
At. Unchi Mandal, Dist. Morbi - 363 642, Gujarat, INDIA

(Domestic enquiry)

E-mail: sales@accordplusceramics.com

Cell: +91 99789 55655

(Export enquiry)

E-mail: export@accordplusceramics.com

Cell: +91 97278 74500

Web: www.accordceramics.com

E-mail: accordplusceramics@gmail.com