

ACCORD
GLAMOUR DE MARBELLA



ADMIRE THE
GORGEOUS ART

M A T T L U S T E R
F I N I S H

300X600MM
COLLECTION



COMPANY OVERVIEW

"The best way to predict the future is to create it."

"Knowledge is worthless if it is not having the direction of customer satisfaction by offering value for money". Keeping this philosophy in our mind & zeal to serve the society in our heart, production becomes a creation at Accord group of companies. The same is reflected in our end products which are certified with ISO 9001: 2015 & CE marking. "Assist people to achieve their objectives & in return, you will achieve yours". We believe that our success lies in the success of our business partners. We put every effort to help our business associates to achieve the highest level of satisfaction & monetary benefits by quality products, competitive prices & above all, a clean policy. Accord management is keeping an eagle's eye on the changing vogues to meet & beat every challenge be it quality, design or price.

Building Area

195K sq. mtrs

Land Area

240K sq. mtrs


Office Area

8K sq. mtrs

Production Capacity

29M sq. mtrs per year



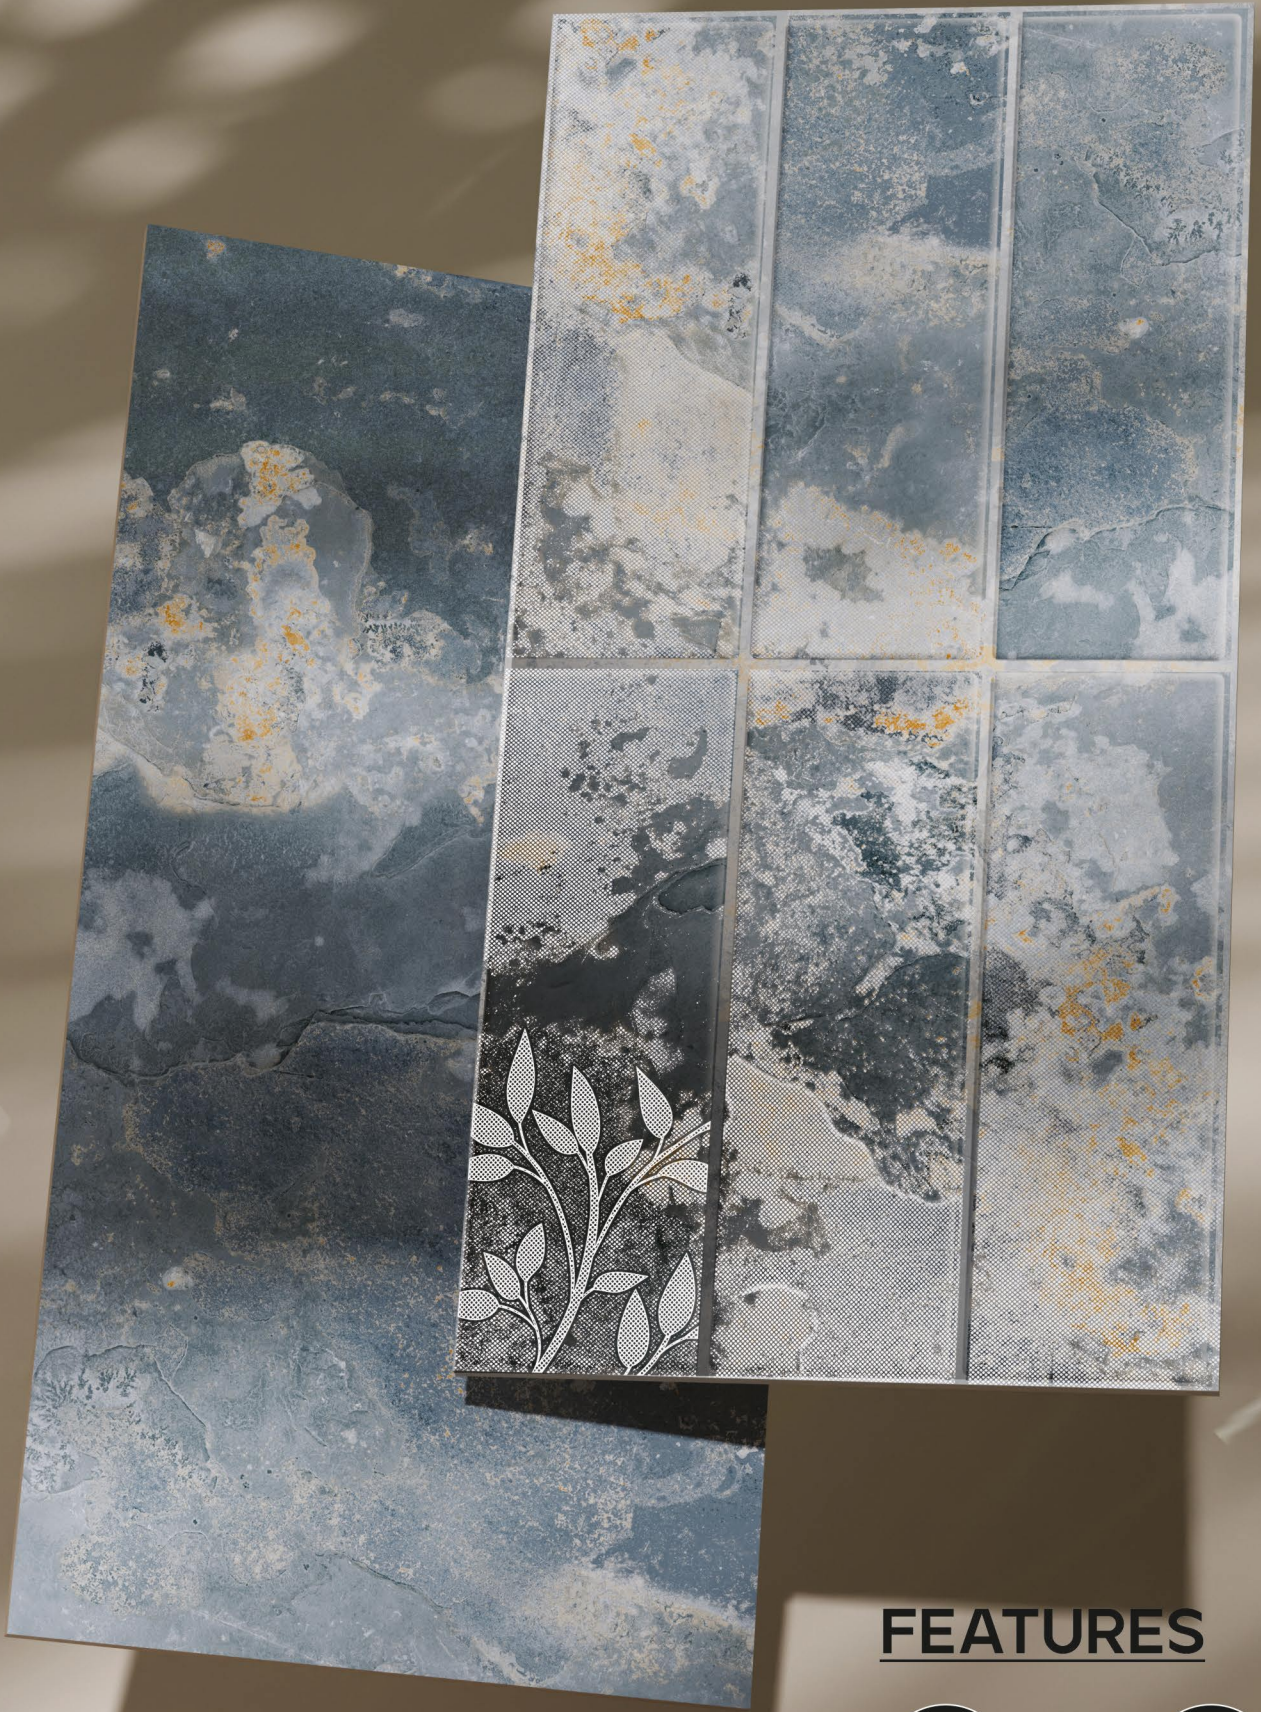

300X600MM
WALL TILES

300x600mm | 250x750mm
300x300mm | 300x450mm

FEATURES



LIVING



HOTEL



OFFICE



INDOOR



BATHROOM



WALL




MATT LUSTER FINISH

Feel the exquisite finish that exudes sensational charm in your space.



35003

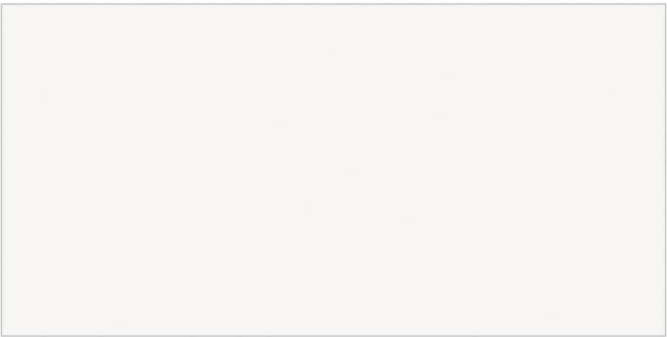

LT



HL 1(L)



DK






35008



LT

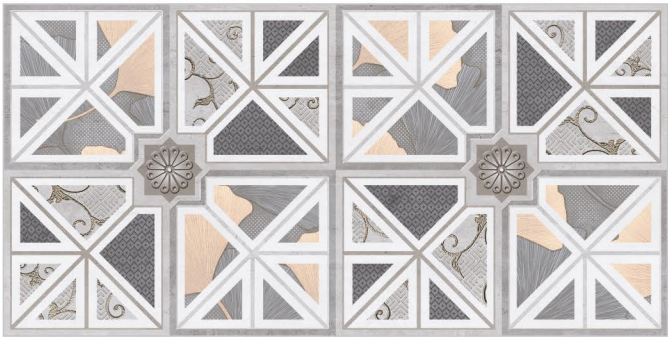

R-6 HL 1(L)



DK

R-6





35009



LT



R-4 HL 1(L)




DK

R-4



35015

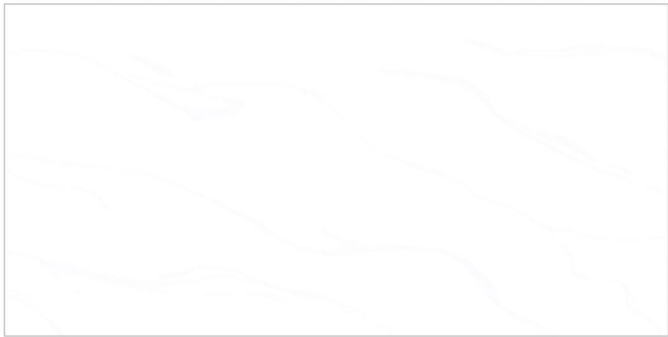

LT(L)

R-3



HL 1(L)




HL 3(L)

R-3



35019

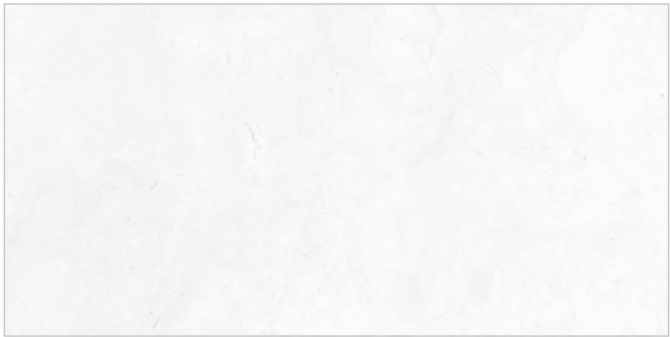

LT



R-4 HL 1(L)



DK



R-4 HL 2(L)





35033



LT(L)



HL 1(L)



35040



LT



R-3 HL 1(L)



DK



R-3 HL 2(L)



35041




LT(L)

R-3



HL 2(L)

R-3

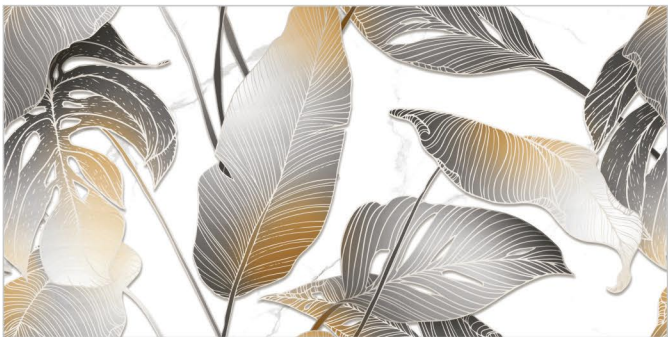

HL 7(L)



35051



LT



R-4 HL 1(L)



DK

R-4



35071




LT(L)



HL 1(L)



35081

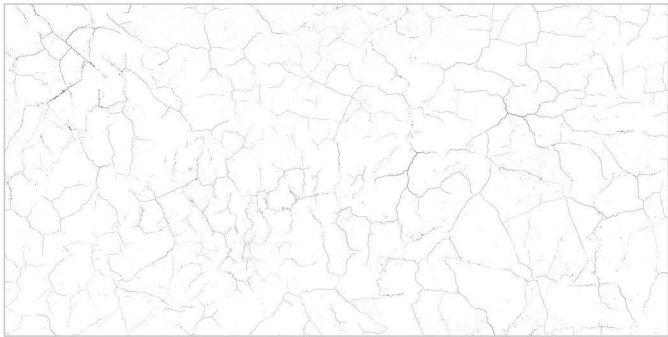


LT(L)



R-4 HL 1(L)



35086

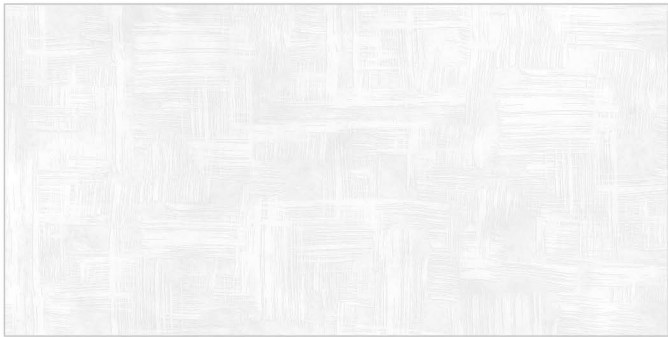

LT(L)




HL 1(L)



35087



LT

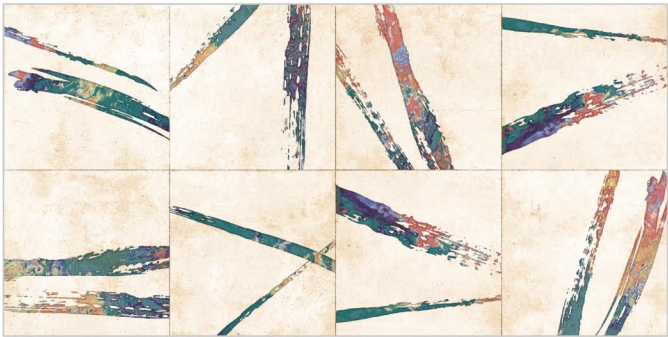


R-4 HL 1(L)



35088



LT

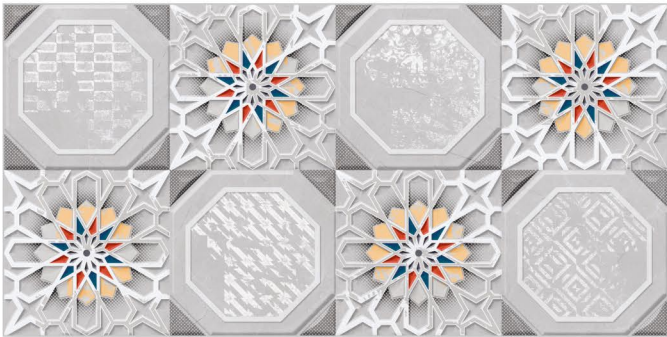

R-4 HL 1(L)




DK

R-4





35091

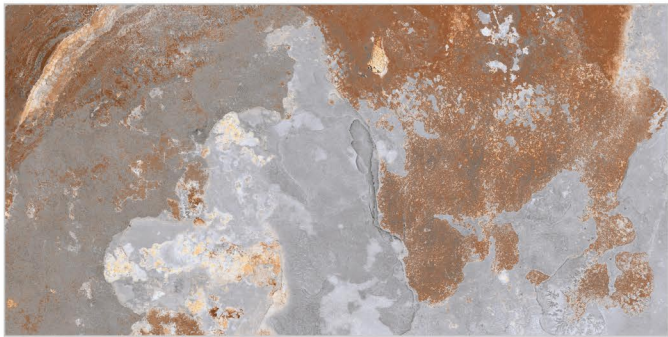


DK(L)




R-4 HL 1(L)



35092

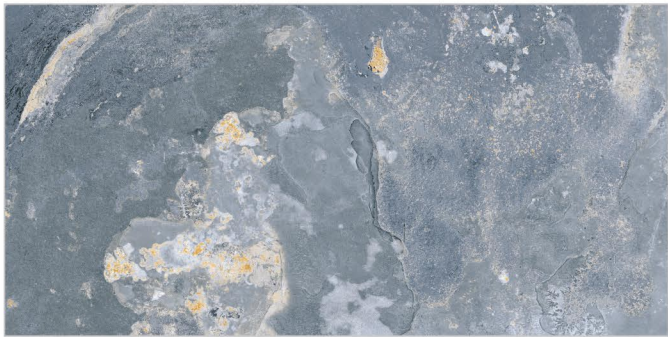


DK(L)

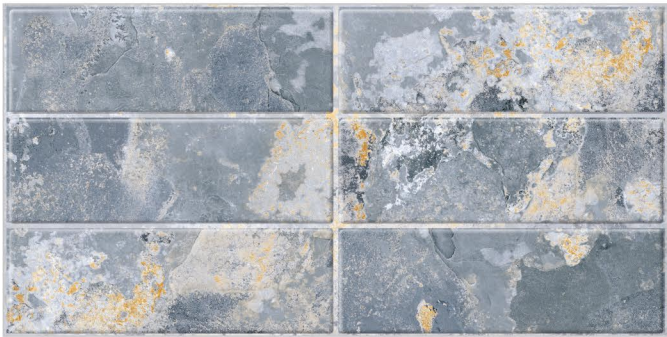

R-4 HL 1(L)



35107

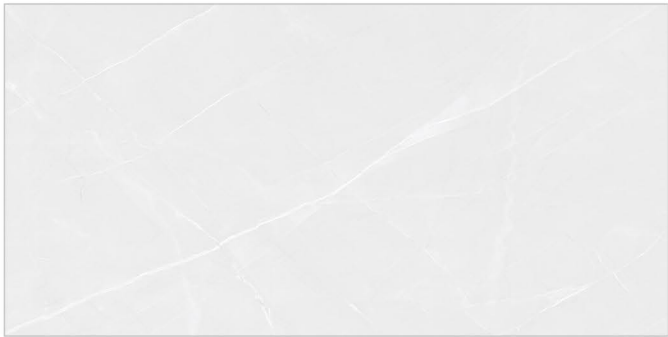

LT



HL 1(L)



DK

R-2

R-2



35108



LT



R-4 HL 1(L)



DK

R-4



35115




LT(L)



R-3 HL 1(L)



35117

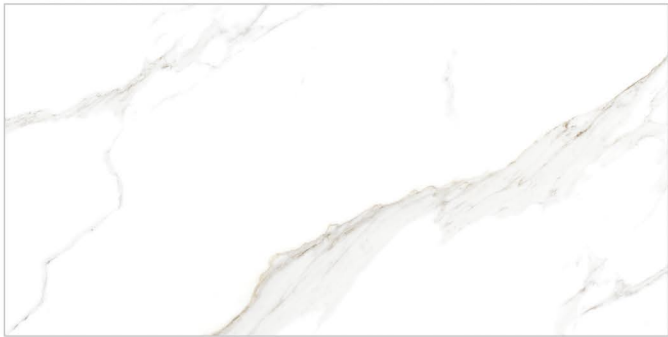


LT



R-3 HL 1(L)



35123

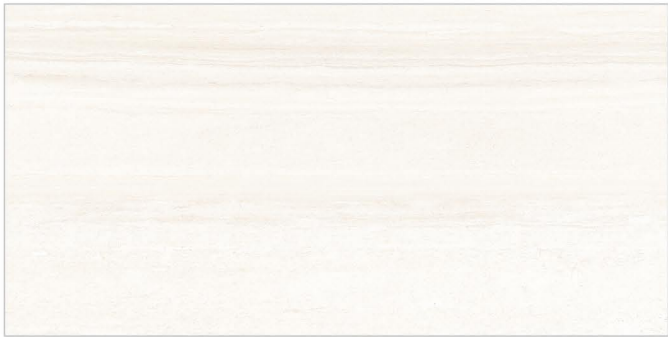

LT



R-3 HL 1(L)



DK

R-3



35128



LT



R-3 HL 1(L)



DK

R-3



35133



LT



R-3 HL 1(L)




DK


R-3



35143

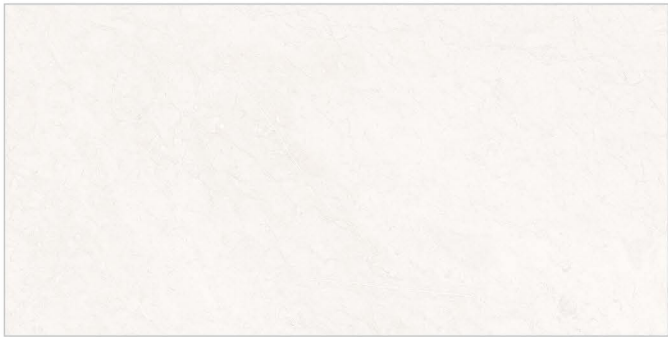

LT

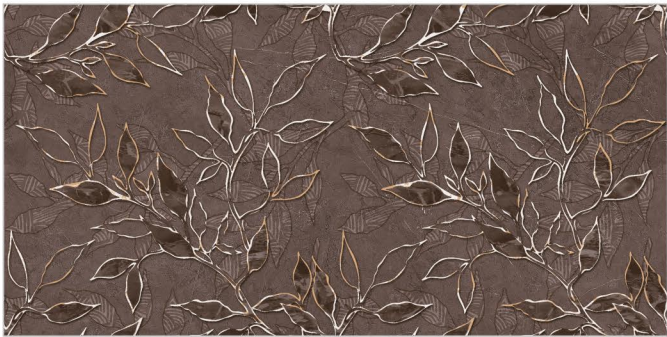

R-3 HL 1(L)



DK

R-3



35148



LT



R-3 HL 1(L)




DK

R-3



35156

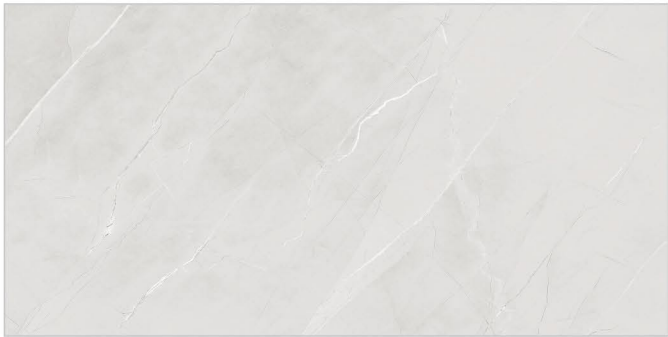

LT(L)




HL 1(L)



HL 2(L)



35160

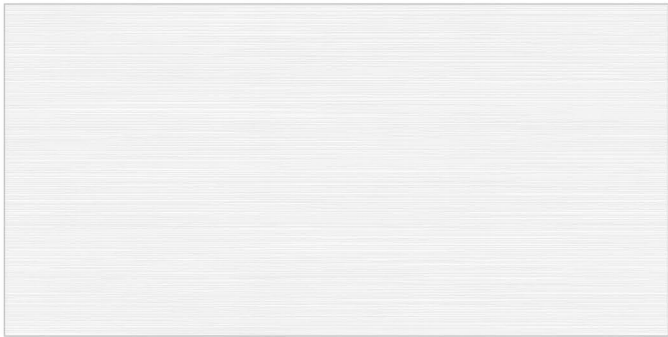

LT(L)



HL 1(L)



35165



LT(L)



HL 1(L)



35171



LT(L)



HL 1(L)



DK(L)



HL 2 (L)



35172



LT(L)



R-3 HL 1(L)



DK(L)



R-3 HL 2(L)



35176



LT(L)

R-3



HL 1(L)

R-3



HL 2(L)



35177



LT(L)



R-4



HL 2(L)



35179



LT(L)



HL 1(L)



35187



LT(L)

R-4



HL 1(L)



HL 2(L)

R-4





35200



LT




HL 1(L)



DK



35207

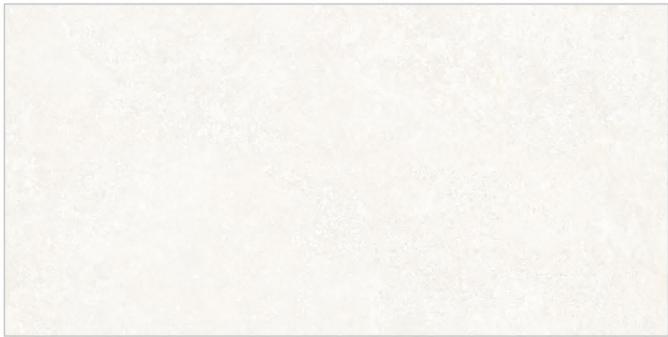

LT(L)



HL 1(L)




DK(L)




HL 2 (L)



35208

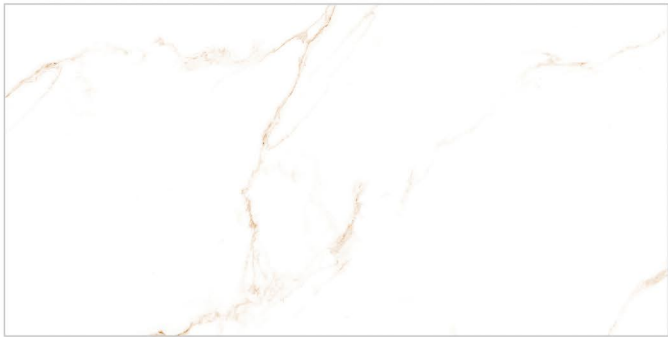

LT

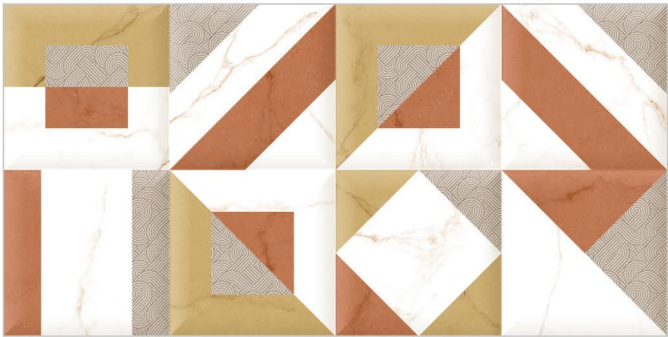

R-3 HL 1(L)

R-2

Cookie Encounter



35217




LT



R-3 HL 1(L)



35221

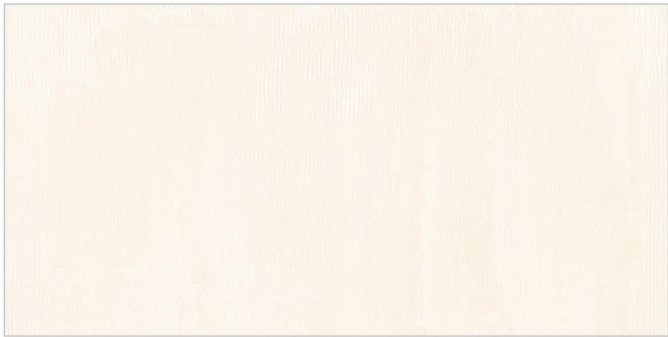

LT



R-3 HL 1(L)



DK

R-3



35222



LT




R-3 HL 1(L)



35223



LT

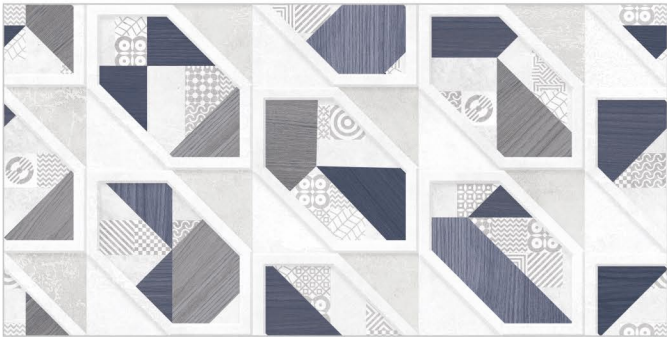

R-3 HL 1(L)



35231



LT



R-4 HL 1(L)



DK

R-4



35238



DK(L)




R-2 HL 1(L)



35248




LT

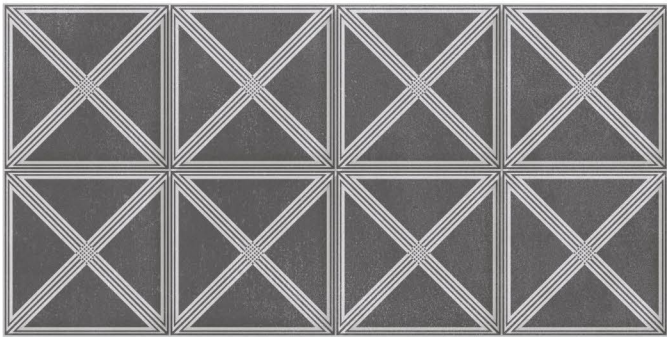

R-3 HL 1(L)



DK

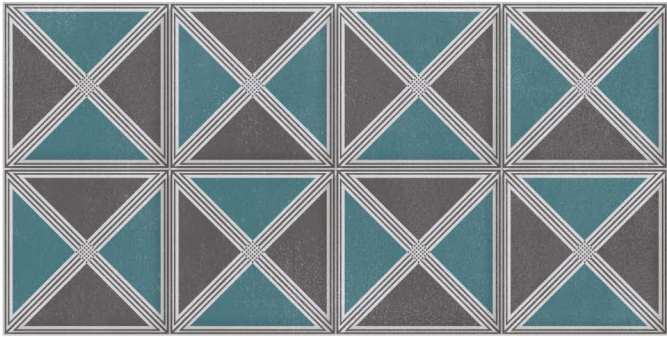


R-3 HL 2(L)



35250



LT

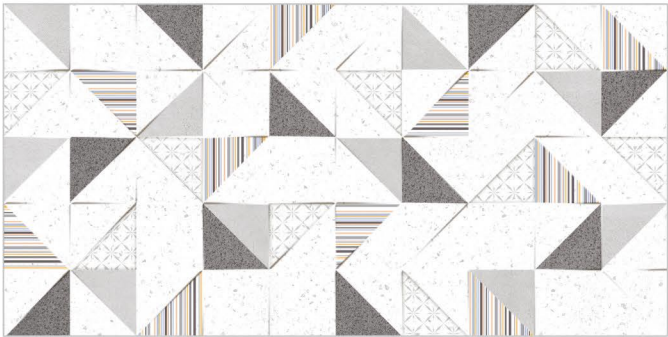

R-3 HL 1(L)



35256



LT(L)

R-3



HL 1(L)



35259



DK



R-3 HL 2(L)




HL 1(L)




HL 3(L)



35262

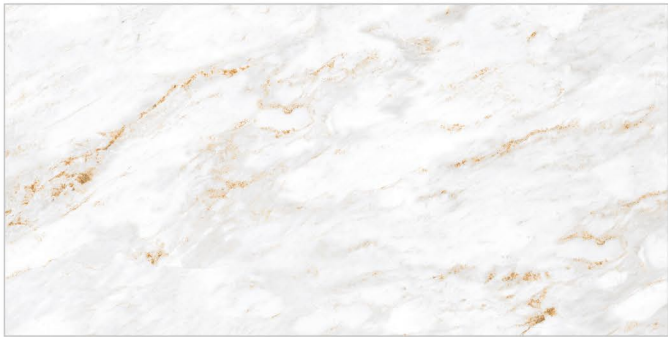

LT(L)

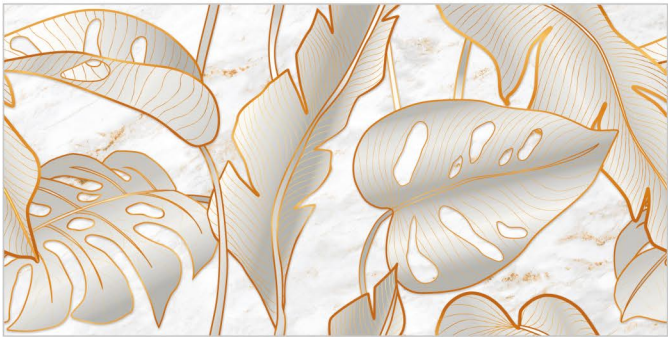

R-3 HL 1(L)



35265



LT



R-4 HL 1(L)



DK

R-4



35266




LT



R-3 HL 1(L)



35272

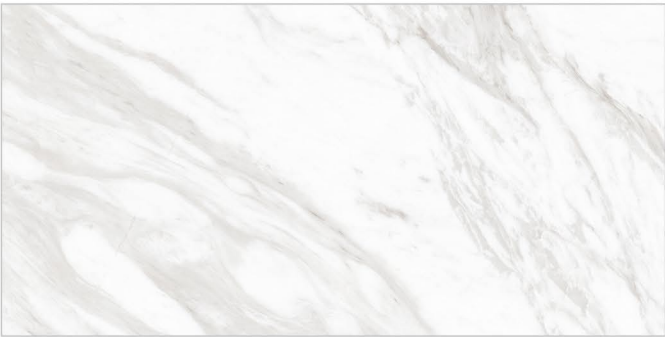

LT



R-3 HL 3(L)



35284



LT

R-4




HL 1(L)



HL 2(L)



35286

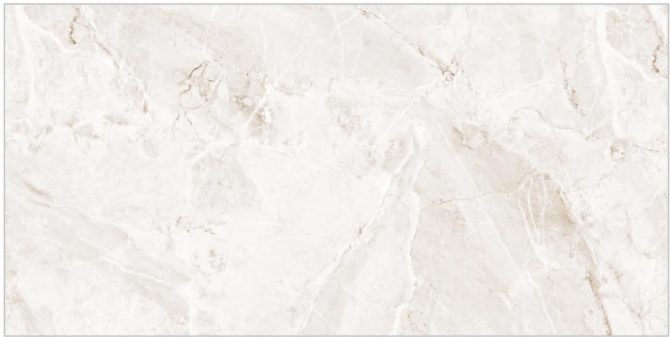

LT



R-4 HL 1(L)



35288



DK



R-4 HL 1(L)



HL 2(L)

FIXING WALL TILES



WALL REQUIREMENT

THE WALL SHOULD BE STRONG AND FLAT AND THE SURFACE SHOULD BE SMOOTH. THE WALL SHOULD BE WAXED/PAINTED. THE WALL SHOULD BE CLEAN AND DRY. IF THE TILING HAS TO BE DONE ON PLYWOOD, THE SURFACE OF WALL SHOULD SEALED WITH 50% VOLUME MIXTURE OF PVA AND WATER.



TILES PREPARATION

MIX THE TILES FROM DIFFERENT CARTOON WHICH WILL HELP IN FINE BLENDING OF SHADES.



TILES LAYING

FIRSTLY, APPLY THE HIGH QUALITY CERAMIC ADHESIVE ON THE WALL AND PLACE FIRST TILE ON THE CORNER. APPLY EVEN PRESSURE ON THE FOUR CORNER OF THE TILE TO ENSURE STICKING. FILL THE AREA OF WALL THE CAN BE FITTED WITH THE TILE WITHOUT CUTTING AND LEAVE IT FOR AT LEAST 12 HOURS. FILL THE REST OF AREA WITH THE MEASURES AND CUT FILES.



TAMPING PROCESS

TO ENSURE THE PROPER CONTACT OF TILES WITH THE WALL, TEMP EVERY TILE WITH A RUBBER MALLET TAMP.



APPLYING GROUT

ON THE NEXT DAY, THE GROUTING IS DONE. APPLY THE GROUT DIAGONALLY BETWEEN THE TILE USING A SPONGE TO FILL THE GAPS BETWEEN THE TILES. CLEAN AND WIPE THE SURPLUS GROUT WITH A SPONGE.



WINDOW RECESS TILLING AND CUTTING

TILES HAS TO BE CUT IN "L" SHAPE FOR WINDOW RECESS. CUT A LINE FROM CENTER TO EDGE AND THEN DRAW A RIGHT ANGLE LINE VERTICALLY DOWN. CUT THE LINE TO GET AN "L" SHAPE THAT CAN IN A WINDOW.



ACCESSORY TILE FITTING

WHILE LAYING THE NORMAL TILES, KEEP ON EMPTY SPACE WHERE THE ACCESSORY TILES WILL BE FITTED. APPLY THE ADHESIVE ON THE BACK OF ACCESSORY TILES AND PLACE IT UNIFORMLY IN THE SPACE AND APPLY EVEN PRESSURE TO PLACE THE ACCESSORY TILE.



TILES DRILLING

APPLY MASKING TAPE TO COVER THE AREA TO BE DRILLED. MARK THE POSITION OF HOLE AND DRILL THE HOLE WITH LOWEST POSSIBLE PRESSURE ON THE DRILL.



CURVE CUTTING

TO FIT THE TILES IN A CURVED SURFACE OF WASHBASIN AND OTHERS, MEASURE AND MARK THE CURVE ON A CARDBOARD BY PLACING THE CARDBOARD ON THE BASIN AND THEN CUT IT.



HOLE CUTTING

TO PASS THE PIPE THROUGH THE TILE, THE TILES NEED TO BE CUT IN A SPECIFIC MANNER. MARK THE POSITION ON THE FILE. WHICH THE TILE. WHICH THE TILE WILL OCCUPY. DRAW A STRAIGHT LINE PASSING THROUGH THE CENTER OF THE CIRCLE. CUT THE TILE ON THE DRAWN AREA. THEN CUT THE SEMI CIRCLE ON EACH OF THE HALF AND WHEN THESE TWO HALVES ARE PLACED TOGETHER, IT WILL FORM A HOLE.

TECHNICAL SPECIFICATION

CHARACTERISTICS	EURO STANDARDS EN - 159 / IS 13753	MEAN VALUE OF ACCORD
DIMENSION & SURFACE QUALITY		
1) Dimension	±0.5%	±0.2%
2) Deviation in Thickness	±0.6 mm	±0.2 mm
3) Straightness of sides	±0.3%	±0.2%
4) Rectangularity	±0.5%	±0.3%
5) Surface Flatness	±0.5%	±0.3%
6) Surface Quality	Min. 95%	Min. 96%
PHYSICAL PROPERTIES		
1) Water Absorption	> 10%	13.5%
2) Bending Strength	> 150 kg/cm ²	200 - 250 kg/cm ²
3) Scratch hardness (Mohs)	Min. 3	Min. 3
4) Crazing	1 Cycle	No Crazing at 4 Cycles
CHEMICAL PROPERTIES		
1) Staining Resistance	Min. Class 2	Resistance to all Acids And Alkalies & Household Chemicals, except Hydrofluoric Acid
2) Household Chemical	Min. Class B	
THERMAL PROPERTIES		
1) Thermal Shock	Resistant to 10 Cycles	CONFORMS
2) Thermal Expansion	Max - 9E ⁻⁰⁶	CONFORMS

Our conformity to the above standard is applicable only for premium quality

PACKING DETAIL

Size	pcs./ Box	sq. ft/ Box	sq. mtrs/ Box	Weight/ Box	Box/Pallet	Pallet/ Container	Total Box/ Container	Total Sq. Mts/ Container	Total Weight/ Container
30x60cm	5	9.68	0.9	14.0 kgs	96	20	1920	1728.00	27456.0
30x30cm	8	7.75	0.72	10.0 kgs	120	23	2760	1987.20	27950.00

Note :

1. Certain amount of size and shade variation is inherent in all ceramic products.

2. Our conformity to the above Fast is applicable only for Quality.

3. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company dose not accept responsibility once the tiles are laid.



ACCORD
GLAMOUR DE MARBELLA

ACCORD PLUS CERAMICS PRIVATE LIMITED

[Mfg. Digital Wall Tiles]

S. No. 134/P7, Near Narmada Canal, Morbi - Halvad Road,
At. Unchi Mandal, Dist. Morbi - 363 642, Gujarat, INDIA

(Domestic enquiry)

E-mail: sales@accordplusceramics.com

Cell: +91 99789 55655

(Export enquiry)

E-mail: export@accordplusceramics.com

Cell: +91 97278 74500

Web: www.accordceramics.com

E-mail: accordplusceramics@gmail.com